

Surface (Membrane)



CERTAIN-PORE

СТВ Туре

Major Applications

Water-based organic solvent

Acid and alkaline chemicals

Water-based resin solution

Features

- Hydrophilic PTFE membrane
- 100% flushing before shipment
- 100% integrity tested

Advantages


- Permeable with high surface tension without pre-wetting
- Excellent chemical compatibility
- Reduction of fiber release
- High reliability

Specifications				
	Grades	001	002	005
Micron Ratings (μ m)		0.1	0.2	0.45
E.F.A.		1.00m²/250mm		
Materials	Media	Hydrophilic PTFE Membrane		
	Core/Cage/Support	Polypropylene		
	End Cap	Polypropylene		
Maximum ΔP		0.49MPa at 20°C (71psi at 68°F)		
Maximum Operating Temp		80 ℃ (176°F)		
Dimen- sions	Length	125/250/500/750 mm		
	0.D.	70.0mm		
	I. D.	25.6 (for 0, 5) / 26.1 (for F) / 30.0 (for 7) mm		
Adaptable Food Sanitation Standard		All raw materials meet the requirement of FDA 21 CFR *1		

*If you need further information on specifcations (length, end cap type, etc.), please contact us. *1 Applicable Gaskets and O-ring materials exclude EPDM.

Differential Pressure vs Flow Rate

Fluid: Refined Water 20°C (68°F) / Cartridge Length: 250mm

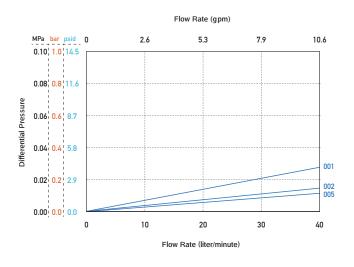

Ordering Information





*The contents of the catalog are subject to change without notice. *The performance data listed in the catalog are Typical values obtained under specific conditions based on our tests.

ROKI GROUP International Pte. Ltd.

6-20-12. Minami-Oi. Shinagawa-ku Tokyo. 140-0013 Japan TEL: +81-3-5764-1131 FAX: +81-3-5764-0681

www.rokiglobal.com

Manufacturing is based on our Quality Management Systems that meet ISO9001 standards. Scope Design, Development, manufacture, and sales of filter cartridges, housings and filtration equipment.



19th Issue CTB210313E