


MICRO-PURE
MPX_{Type}
Major Applications

Chemicals

Industrial water, Pure water

Beverages

Resin dissolving liquid

Coating agent for film

Features

- Pleated type with wide filtration area
- Variety of micron ratings
- 100% Polypropylene
- No use of binder or surfactant

Advantages

- Excellent differential pressure vs. flow rate
- Optimal micron ratings selection according to the purpose
- Wide range of fluid compatibility
- Low extractables risk

Specifications


Grades	006	012	025	045	060	100	150	200	300	400
Micron Ratings (μm)	0.6	1.2	2.5	4.5	6.0	10	15	20	30	40
E.F.A. (m ² /250mm)	0.55	0.75	0.75	0.75	0.35	0.48	0.53	0.48	0.48	0.38
Media	Polypropylene									
Materials Core/Cage/Support	Polypropylene									
End Cap	Polypropylene									
Maximum ΔP	0.49MPa at 20°C (71psi at 68°F)									
Maximum Operating Temp	80 °C (176°F)									
Length	125 / 250 / 500 / 750 mm									
Dimensions O.D.	70.0mm									
I. D.	25.6 (for 0, 5) / 26.1 (for F) / 30.0 (for 7) mm									
Adaptable Food Sanitation Standard	All raw materials meet the requirement of FDA 21 CFR *1									

*If you need further information on specifications (length, end cap type, etc.), please contact us.

*1 Applicable Gaskets and O-ring materials exclude EPDM.

Differential Pressure vs Flow Rate

Fluid: Refined Water 20°C (68°F) / Cartridge Length: 250mm

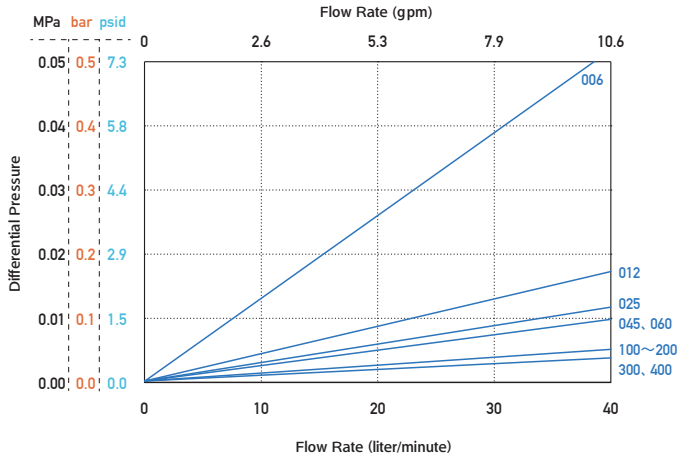

Particle Removal Efficiency

Grades Particle Size (μm)	Particle Removal Efficiency (%)									
	006	012	025	045	060	100	150	200	300	400
0.6	> 98									
1.2	> 99.9	> 98	> 95	> 95						
2.5		> 99.9	> 99.9	> 99.9	> 99.9	> 98				
4.5						> 99.9				
6.0							> 95			
10							> 99.8	> 95		
15							> 99.9	> 99.8	> 98	
20								> 99.9	> 99.7	> 98
30									> 99.9	> 99.9

Test Conditions

Equipment : Liquid Particle Counter
 Filtration : Single Pass
 Fluid : Refined Water
 Flow Rate : 10 liter/minute
 Dust : ACFTD + LATEX Beads

Ordering Information

Length	Product Type	Micron Rating	Gasket/O-Ring	End Cap Code	Packaging Code
7 5 0 L	-MPX-	0 0 6	E	F	B
125 = 125mm 250 = 250mm 500 = 500mm 750 = 750mm		006 = 0.6 μm 100 = 10 μm 012 = 1.2 μm 150 = 15 μm 025 = 2.5 μm 200 = 20 μm 045 = 4.5 μm 300 = 30 μm 060 = 6.0 μm 400 = 40 μm	S = Silicone E = EPDM N = NBR V = FKM T = FEP Encapsulated FKM (for 0, 5, 7) PTFE (for F)	F = Flat Gaskets 0 = 2-222 O-Ring 5 = 2-222 O-Ring + Fin 7 = 2-226 O-Ring + Fin	B = 6pcs C = 10pcs F = 25pcs

End Cap Code



*The contents of the catalog are subject to change without notice.

*The performance data listed in the catalog are Typical values obtained under specific conditions based on our tests.

ROKIGROUP International Pte. Ltd.

6-20-12, Minami-Oi, Shinagawa-ku Tokyo, 140-0013 Japan
 TEL: +81-3-5764-1131 FAX: +81-3-5764-0681

www.rokiglobal.com

Manufacturing is based on our Quality Management Systems that meet ISO9001 standards.

Scope
 Design, Development, manufacture, and sales of filter cartridges, housings and filtration equipment.



22nd Issue
 MPX200715E