


**MICRO-PURE**
**MPX<sub>Type</sub>**
**Major Applications**

Chemical solutions

Various beverages

Industrial water and manufacturing water

Lubricant oil

**Halal Certified**

Halal certification is a system whereby a certification body conducts an audit of the product in question and certifies that it has been produced and supplied in accordance with Islam.


**Features**

- Pleated type with wide filtration area
- Variety of micron ratings
- 100% Polypropylene
- No binders or surfactants used

**Advantages**

- Excellent differential pressure vs. flow rate
- Optimal micron ratings selection according to the purpose
- Wide range of fluid compatibility
- Low extractables risk

**Specifications**


Grades	006	012	025	045	060	100	150	200	300	400
Micron Ratings (μm)	0.6	1.2	2.5	4.5	6.0	10	15	20	30	40
E.F.A. (m <sup>2</sup> /250mm)	0.55	0.75	0.75	0.75	0.35	0.48	0.53	0.48	0.48	0.38
Media	Polypropylene									
Materials Core/Cage/Support	Polypropylene									
End Cap	Polypropylene									
Maximum ΔP	0.49MPa at 20°C (71psi at 68°F)									
Maximum Operating Temp	80 °C (176°F)									
Length	125 / 250 / 500 / 750 mm									
O.D.	70.0mm									
I. D.	25.6 (for 0, 5) / 26.1 (for F) / 30.0 (for 7) mm									
Adaptable Food Sanitation Standard	All raw materials meet the requirement of FDA 21 CFR *1									

\*If you need further information on specifications (length, end cap type, etc.), please contact us.

\*1 Applicable Gaskets and O-ring materials exclude EPDM.

## Differential Pressure vs Flow Rate

Fluid: Refined Water 20°C (68°F) / Cartridge Length: 250mm

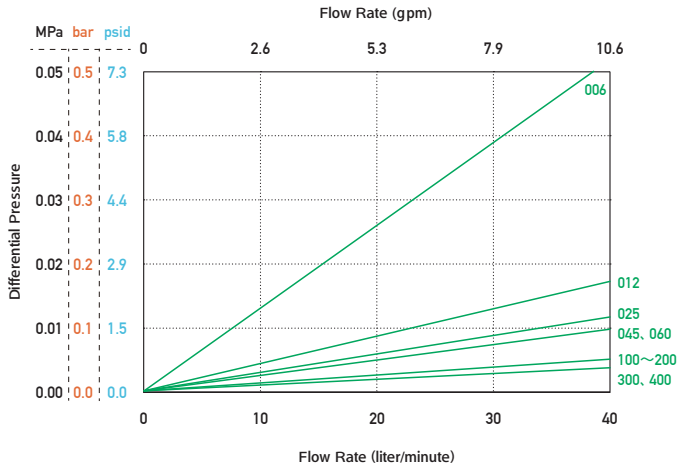

## Particle Removal Efficiency

Particle Size (μm)	006	012	025	045	060	100	150	200	300	400
0.6	>98									
1.2	>99.9	>98	>95	>95						
2.5		>99.9	>99.9	>99.9	>99.9	>98				
4.5						>99.9				
6.0							>95			
10							>99.8	>95		
15							>99.9	>99.8	>98	
20								>99.9	>99.7	>98
30									>99.9	>99.9

### Test Conditions

Equipment : Liquid Particle Counter  
 Filtration : Single Pass  
 Fluid : Refined Water  
 Flow Rate : 10 liter/minute  
 Dust : ACFTD + LATEX Beads

## Ordering Information

Length	Product Type	Micron Rating	Gasket/O-Ring	End Cap Code	Packaging Code
<b>7 5 0 L</b>	<b>-MPX-H</b>	<b>0 0 6</b>	<b>E</b>	<b>F</b>	<b>B</b>
125 = 125mm 250 = 250mm 500 = 500mm 750 = 750mm		006 = 0.6 μm    100 = 10 μm 012 = 1.2 μm    150 = 15 μm 025 = 2.5 μm    200 = 20 μm 045 = 4.5 μm    300 = 30 μm 060 = 6.0 μm    400 = 40 μm	S = Silicone E = EPDM N = NBR V = FKM T = FEP Encapsulated FKM (for 0, 5, 7) PTFE (for F)	F = Flat Gaskets 0 = 2-222 O-Ring 5 = 2-222 O-Ring + Fin 7 = 2-226 O-Ring + Fin	B = 6pcs C = 10pcs F = 25pcs

## End Cap Code



\*The contents of the catalog are subject to change without notice.

\*The performance data listed in the catalog are Typical values obtained under specific conditions based on our tests.

# ROKI GROUP International Pte. Ltd.

6-20-12, Minami-Oi, Shinagawa-ku Tokyo, 140-0013 Japan  
 TEL: +81-3-5764-1131 FAX: +81-3-5764-0681

[www.rokiglobal.com](http://www.rokiglobal.com)

Manufacturing is based on our Quality Management Systems that meet ISO9001 standards.

Scope  
 Design, Development, manufacture, and sales of filter cartridges, housings and filtration equipment.



JQA-QMA16323

MS CM009

6th Issue  
 MPX\_H\_220224LE