



SLOPE-PURE SDF Type

Major Applications

- Pigment-based inkjet ink
- Color resist
- CMP slurry
- Various high-concentration dispersions
- Food & beverage


Features

- Unique structure for Pulsation pressure reduction layer
- Depth filter structure with wide filtration grade slope
- Polypropylene / Polyethylene filter media, parts
- No use of binder or surfactant

Advantages

- Stable filtration is possible by suppressing pulsation pressure
- Sustain stable filtration performance during long-term use of high-concentration dispersion
- Available for high-concentration dispersion filtration with a wide particle size distribution
- Wide range of fluid compatibility
- Low extractables risk

Structure

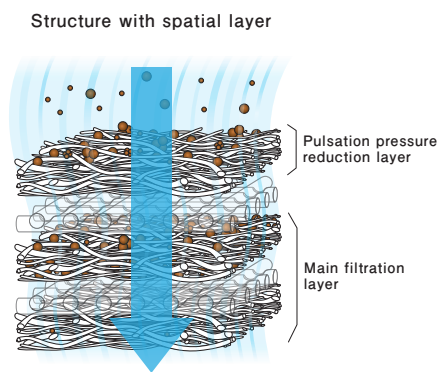


Specifications

Grades	005
Micron Ratings	0.5µm
Media	Polypropylene, Polyethylene
Materials Core/Cage	Polypropylene
End Cap	Polypropylene (for F, 0, 5, 7)
Maximum ΔP	0.49MPa at 20°C (71psi at 68°F)
Maximum Operating Temp	60°C (140°F) *for End Cap Code PZ only / 80 °C (176°F)
Length	125 / 250 / 500 / 750 mm
Dimensions	O.D.
	I.D.
Adaptable Food Sanitation Standard	70.0 (for PZ, F, 0, 5, 7) mm 25.5 (for PZ) / 25.6 (for 0, 5) / 26.1 (for F) / 29.5 (for 7) mm All raw materials meet the requirement of FDA 21 CFR *1

*If you need further information on specifications (length, end cap type, etc.), please contact us.
*1 Applicable Gaskets and O-ring materials exclude EPDM.

Differential Pressure vs Flow Rate

Fluid: Refined Water 20°C (68°F) / Cartridge Length: 250mm

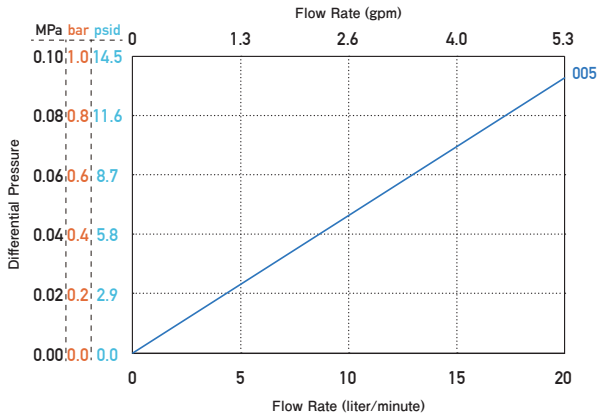

Particle Removal Efficiency

Grades	Particle Removal Efficiency (%)
005	>99
0.3	
0.5	
0.7	
1.0	
3.0	

Test Conditions

Equipment : Particle Counter in Liquid
 Filtration : Single Pass
 Fluid : Refined Water
 Flow Rate : 10 liter/minute
 Dust : Alumina + Boehmite

Ordering Information

Nominal Length	Product Type	Micron Rating	Gasket/O-Ring	End Cap Code	Packaging Code
2 5 0 L	-SDF-	005	P	Z	F
125 = 125 mm 250 = 250 mm 500 = 500 mm 750 = 750 mm		005 = 0.5 μm	P = Foamed polyethylene S = Silicone E = EPDM N = NBR V = FKM T = FEP Encapsulated FKM (for 0, 5, 7) PTFE (for F)	Z = For P F = Flat Gaskets 0 = 2-222 O-Ring 5 = 2-222 O-Ring + Fin 7 = 2-226 O-Ring + Fin	B = 6pcs C = 10pcs F = 25pcs

End Cap Code



*The contents of the catalog are subject to change without notice.

*The performance data listed in the catalog are Typical values obtained under specific conditions based on our tests.

ROKI GROUP International Pte. Ltd.

6-20-12, Minami-Oi, Shinagawa-ku Tokyo, 140-0013 Japan

TEL: +81-3-5764-1131 FAX: +81-3-5764-0681

www.rokiglobal.com

Manufacturing is based on our Quality Management Systems that meet ISO9001 standards.

Scope

Design, Development, manufacture, and sales of filter cartridges, housings and filtration equipment.



JQA-QMA16323

MS CM009

1st Issue
SDF21 0304E